



CEL-FI

Cel-Fi™ DUO+

## Quick Start Guide



NETWORK UNIT

COVERAGE UNIT

### Cel-Fi DUO+ Smart Signal Booster™

A true plug-and-play system that doesn't require the installation of antennas or cables.

**To use this product you need:**

- An LTE compatible mobile phone with qualifying LTE service
- An area inside your home that receives at least one bar of 4G LTE coverage
- Power outlets

**In this package you will find:**

- Network Unit
- Coverage Unit
- Two Power Adapters
- Two Mounting Brackets with hardware

## BEFORE You Begin

If you can find a place in your home that gets at least one bar of 4G LTE signal, the revolutionary **Cel-Fi DUO+** Smart Signal Booster system brings you smoother video and surfing, and improved coverage throughout your home. **Cel-Fi DUO+** Smart Signal Booster is a true plug-and-play system that doesn't require the complicated installation of antennas or cables.

### Step 1

#### Find the location with the best coverage:

The first step in setting-up your **Cel-Fi DUO+** Signal Booster is to find the location with the best mobile network signal. Use your phone to identify the area with the best signal. Typically, the best service will be near a window in the highest floor of your space. **Make sure a 4G LTE icon is displayed on your handset.**



### Step 2

#### Plug-in the Network Unit:


Plug the **Network Unit** into an easily accessible outlet near the area with the strongest 4G LTE signal. (Note: the power supplies in your kit are identical.) Make sure that at least one bar is displayed on the signal strength indicator on the front of the **Network Unit**. If you do not see at least one bar, try a different location.



### Step 3

#### Optimize the Network Unit Placement:


The bars on the front of the device indicate the strength of the mobile network signal in the area. Moving the **Network Unit** to a different location may increase the signal, and can improve the quality of your service.



## Step 4

### Place the Coverage Unit:

Place the **Coverage Unit** as far away, inside the space, as possible from the **Network Unit** or where you need coverage the most, making sure that you have enough distance between the two units. After several minutes, the numeric display will stop cycling.

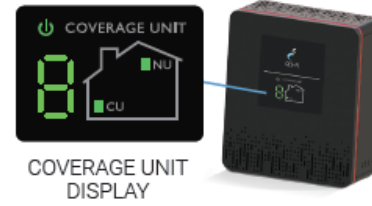


If your device is set-up properly, the green icons will appear on the display as seen above. It is possible to place the **Coverage Unit** too close or too far from the **Network Unit**. If this happens, a red icon will illuminate indicating that you need to move the **Coverage Unit** either closer to, or further away from the **Network Unit** (see below).

<b>GOOD</b> Two green icons indicate that the Coverage Unit is functioning normally.	<b>TOO FAR</b> Four red icons & a scrolling display indicate that the Coverage Unit needs to be moved closer to the Network Unit.	<b>TOO CLOSE</b> A zero on the numeric display indicates that the Coverage Unit needs to be moved farther away from the Network Unit.

## Step 5

### Optimize The Coverage Unit Placement:

The number on the front of the **Coverage Unit** display indicates the quality of the placement. For the best service experience, move the **Coverage Unit** around your home until an **8 or 9** displays. Based on the **Coverage Unit** number, you may need to move farther/closer to the **Network Unit**.

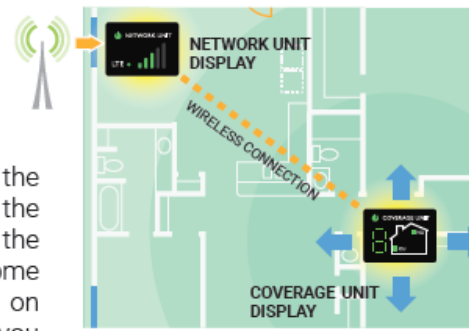

- 5 For the best service, move the Coverage Unit until an 8 or 9 displays.

# Get More from Cel-Fi WAVE

Cel-Fi WAVE is an application available on both smartphones and desktop computers that allows users to interact with Cel-Fi, to access advanced and supplementary features.



## Dashboard:

Glance-able view to the state of your Cel-Fi environment.

## Advanced Mode:

Get a real-time technical overview of the installation of your Cel-Fi Booster.

## Booster Updates:

Keep your Cel-Fi Booster up-to-date as new software versions become available.

## Register: *(When Required)*

Easily register your Cel-Fi Booster.

For more information, and software, go to:  
[www.cel-fi.com/wave](http://www.cel-fi.com/wave)



Copyright © 2016 by Nextivity, Inc. U.S. Patents pending. All rights reserved. The Nextivity and Cel-Fi logos are registered trademarks of Nextivity Inc. All other trademarks or registered trademarks listed belong to their respective owners. Designed by Nextivity Inc in California.  
q9g\_DUO+LTE-English-16-0211



420N007-D32-011-LTE-RA

# Mounting Instructions




Each Cel-Fi device may be supplied with mounting brackets and hardware to mount both (or either) the **Coverage Unit** and the **Network Unit**.

**NOTE:** The brackets come equipped with screws and inserts for mounting in standard drywall. Before you install the mounts, make sure there are no wires or other objects, or metal plates, behind the drywall layer that will interfere with the inserts, screws, mount, or mounted units.

## 1 Determine Cel-Fi Device Location (refer to other side)




## 2 Determine Mounting Hole Locations

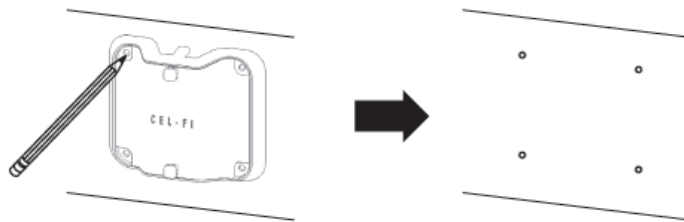


## 3 Drill Anchor Holes (Drywall)

In each marked spot, use a 3/16" **drill bit** to drill guide holes for the anchors.

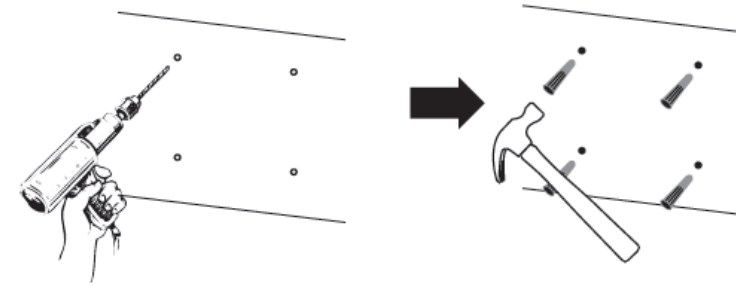


## 4 Install Anchors (Drywall)


## 5 Install Mounting Bracket

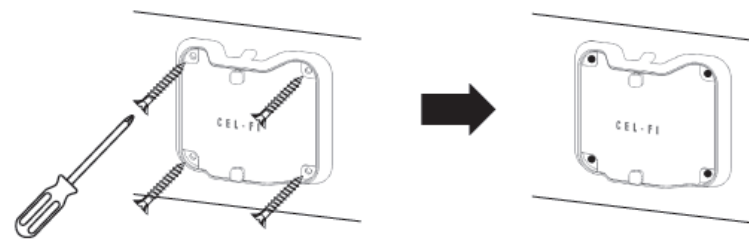

## 6 Attach the Cel-Fi Unit to the wall mounted bracket





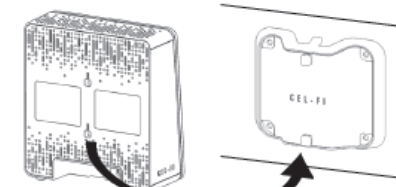











**Figure 1**  
Back view with mounting holes.



**Figure 2**  
Backside of unit fits onto bracket hooks.

**IMPORTANT:** Your **Cel-Fi DUO+ Smart Signal Booster** is electronic equipment. Both units must be kept indoors and in a dry, cool, well ventilated area.

# Troubleshooting

NETWORK UNIT			
Indicator	Issue	Try This	
 <p>Power &amp; Status Indicator</p> <p>Power indicator is off.</p>	No lights on the <b>Network Unit</b> display.	The device is not receiving power.	
	Power indicator is red.	<b>Network Unit</b> hardware issue.	
	Power indicator is green but no bars on the <b>Network Unit</b> display.	<b>Network Unit</b> does not have a 4G LTE signal.	
	Power indicator is Flashing Green.	<b>Network Unit</b> is setting up communications with <b>Coverage Unit</b> .	
 <p>LTE Indicator</p> <p>Signal Indicator</p>			
COVERAGE UNIT			
Indicator	Issue	Try This	
 <p>Power &amp; Status Indicator</p> <p>Network Unit Indicator</p>	No lights on the <b>Coverage Unit</b> display.	The device is not powered.	
	<b>Coverage Unit</b> Power Indicator is red	System Error.	
	Seven segment display cycling for more than a minute.	The <b>Coverage Unit</b> still trying to wirelessly connect to the <b>Network Unit</b> .	
	Zero displayed.	The <b>Coverage Unit</b> is "Too Close" to the <b>Network Unit</b> .	
	The <b>Coverage Unit</b> and <b>Network Unit</b> icons are red with two arrows.	The <b>Coverage Unit</b> is "Too Far Away" from the <b>Network Unit</b> .	
 <p>Network Unit Indicator</p>  <p>Coverage Unit Indicator</p>  <p>Seven Segment Display</p>			
PERFORMANCE			
<p>The Coverage Unit has a boosted signal but only in a small area.</p>	Low <b>Coverage Unit</b> number or <b>Network Unit</b> input signal.	<b>Network Unit</b> and <b>Coverage Unit</b> are too close together or <b>Network Unit</b> signal level is low.	
		Move the <b>Coverage Unit</b> away from the <b>Network Unit</b> to get a higher coverage number. This can mean putting the <b>Coverage Unit</b> on the opposite end of your home. Higher numbers indicate better coverage. You can also move the <b>Network Unit</b> to an area with a stronger signal. More bars is always better.	
ERROR MESSAGES			
Indicator	Issue	Try This	
 <p>Alternating E and Numeric Error Code</p>	E1	No 4G LTE signal at the <b>Network Unit</b> .	
	E3	<b>Coverage Unit</b> is overheating.	
	E4	<b>Network Unit</b> is overheating.	
	E5	Registration Required.	
	E8	Input signal at <b>Network Unit</b> too strong.	
	E9	Your system was moved from its original address. Registration required due to location lock.	
		Try moving the <b>Network Unit</b> to another room or area where you have coverage. (Use your cell phone to find the best 4G LTE coverage).	
		Make sure that the vents on the unit are not blocked. Move the unit to a cooler area. The system will start working normally when it cools down.	
		Register your address with your mobile network provider, using the <b>Cel-Fi Wave app</b> .	
		Your <b>Network Unit</b> is too close to a cellular tower. This may result in a reduced output power (smaller coverage bubble) to limit network interference. Note: If you have satisfactory boost in cellular service you can ignore this message. Otherwise move your <b>Network Unit</b> to another location. You might need to move your <b>Network Unit</b> to the other side of your home/office.	
		Either move the system back to its original location or register your new address with your mobile network provider, using the <b>Cel-Fi Wave app</b> .	

If you see any other error messages or for additional information about **Cel-Fi DUO+ Signal Booster Installation** go to: [www.cel-fi.com/support](http://www.cel-fi.com/support)